







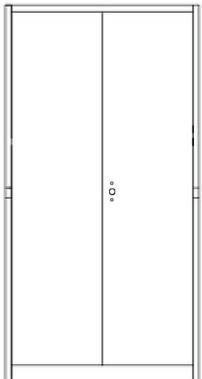




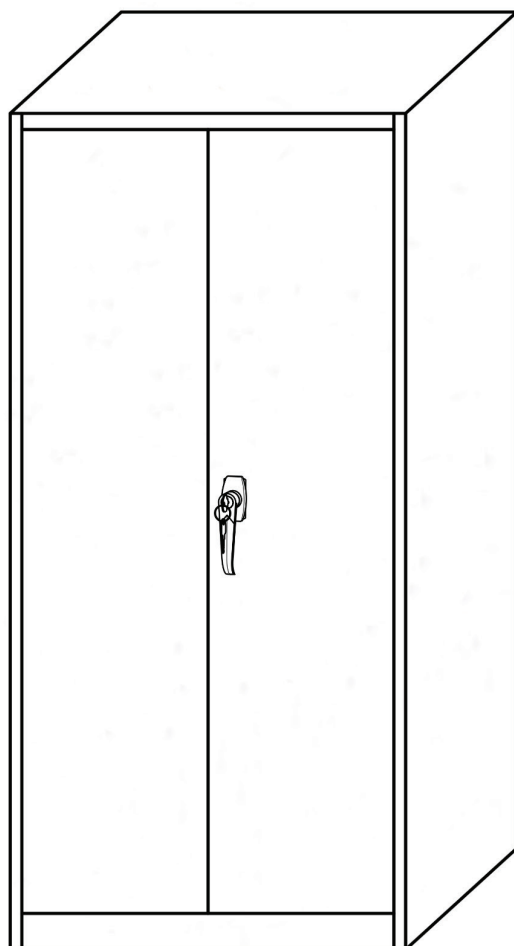


KLETON

FN425-FN427 ASSEMBLY INSTRUCTIONS



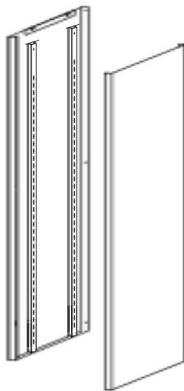
-  If in doubt contact your supplier.
-  Please read these instructions thoroughly before commencing assembly.
-  Inspect all packages for damage and check that all components have been supplied.
-  Assembly should be undertaken by at least two people.
-  Caution During Assembly.
-  Wear appropriate clothing. Protective gloves and footwear are recommended.
-  Dispose of packaging materials responsibly.
-  Make sure the floor is level.
-  Allow adequate working space and be aware of others working around you.
-  Not suitable for use in damp or wet environments.
-  Take care when handling heavy items particularly when lifting or stretching.

Parts List

<p>Top Plate: 1pc</p>  <p>A</p>	<p>Self Tapping Screw (5*12): 6pcs</p>  <p>D</p>	<p>Plastic Cap: 2pcs</p>  <p>H</p>	<p>K L</p> 	<p>M</p> 	<p>N</p> 
<p>Bottom Plate: 1pc</p>  <p>B</p>	<p>Key: 2pcs</p>  <p>E</p>	<p>Lock Cover: 1pc</p>  <p>I</p>			
<p>Shelf: 4pcs</p>  <p>C</p>	<p>Hanging Plate: 10 pc</p>  <p>F</p>	<p>Lock Bar: 2pcs</p>  <p>J</p>			
	<p>Lock Set: 1 set</p>  <p>G</p>				


Assembly Instructions

1.

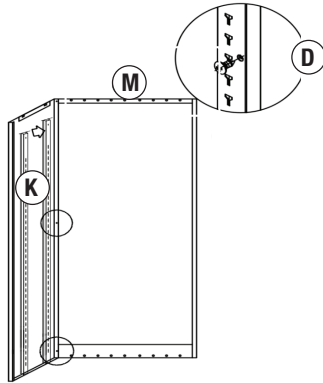


Bolt the left side plate and back plate together with 2 self-tapping screws (5*12).

2.

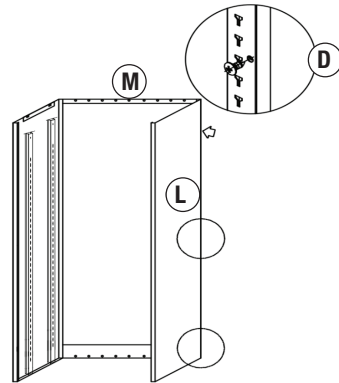


Bolt the right side plate and back plate together with 2 self-tapping screws (5*12).

3.




Open the door and clip the door frame to the side plates.

4.



Locate the top plate.


5.



Bolt the left/right side plates and top, back plates together with 2 self-tapping screw (5*12).


Assembly Instructions

6.




Bolt the left and right hanging board into the left and right side plate according to the diagram.

7.




Load the partition and botte plate into the cabinet as shown.

8.




Put the poke stick and lock into the cabinet according to the diagram.

Installation Steps for Door Handle:

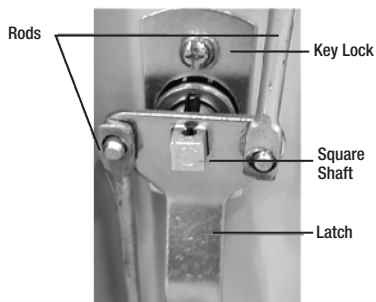


- 1) Remove access panel for the locking mechanism.
- 2) Install the key lock(G) using the Philips screws.
- 3) Mount the latch onto the square shaft of the key lock(G)
- 4) Install both the rods through the top and bottom holes of the door (N) respectively and mount to latch (see figure).

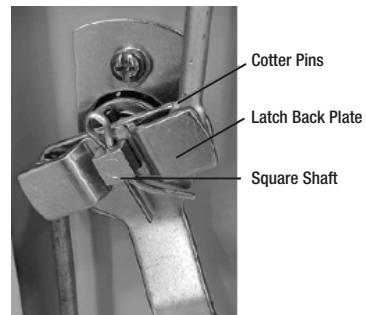

- 5) Mount the Latch back plate on the square shaft and us the cotter pin to lock it in place (see figure).
- 6) Re-install/Install access panel.

9.



Finished